



DS203en

Data Sheet

TDI1-Series (T)

Duct Temperature Sensor**All relevant national and local electrical installation**

The TDI1-Series (T) is designed to measure temperature in air ducts or water pipes

The sensor operates with low voltage power supply

Reading/Parameter settings via NFC technology

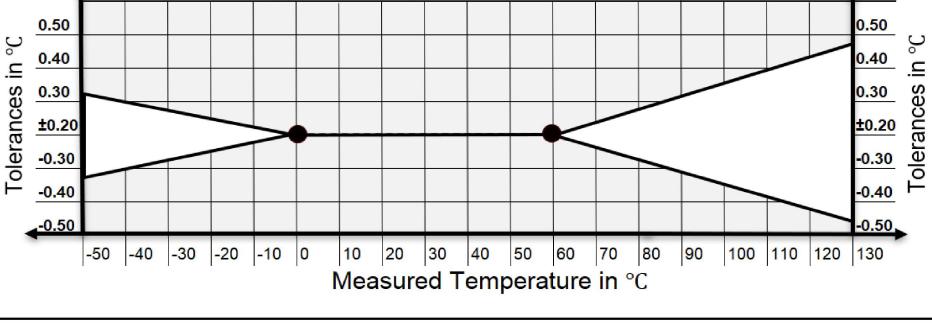
Cover/bottom housing connected with magnets and two screws

The temperature sensor output is active



Use	Compatible to all common HVAC DDC and Analog Controls systems, with/without Building Automation System							
	Used in all common HVAC applications							
	Used in Commercial and Industrial Buildings							
Features	Sensor with active output							
	Sensor Output 0–10 V or 4–20 mA							
	Reading/Parameter settings via NFC technology							
	Different immersion lengths for all common air duct and water pipe sizes							
	Professional and practical product design							
	Cover/bottom housing connected with magnets and two screws							
	Firmware updates via service connector							
	Easy to use, install and maintain							
Product Range	Temperature Sensor					Thermowell		
	Type Code	Output	Sensor Accuracy	Power Supply	Measuring Ranges	Immersion Pocket Dimensions	Type Code	Immersion Pocket Dimensions
	TDI1G.HA	0–10 V	±0.2 °C between 0 °C to +50 °C AC/DC 24 V (±10 %) –20 °C to +80 °C (default) –40 °C to +135 °C via NFC adjustable		ø6mm × 50 mm ø6 mm × 100 mm ø6 mm × 150 mm ø6 mm × 200 mm ø6 mm × 250 mm ø6 mm × 300 mm ø6 mm × 450 mm		TPA0G.Ga	ø9 mm × 50 mm
	TDI1G.HD	4–20 mA					TPA0G.Ma	ø9 mm × 100 mm
	TDI1G.IA	0–10 V					TPA0G.Ha	ø9 mm × 150 mm
	TDI1G.ID	4–20 mA					TPA0G.Ia	ø9 mm × 200 mm
	TDI1G.KA	0–10 V					TPA0G.Ka	ø9 mm × 250 mm
	TDI1G.KD	4–20 mA					TPA0G.La	ø9 mm × 300 mm
	TDI1G.LA	0–10 V					TPA0G.Na	ø9 mm × 450 mm
	TDI1G.LD	4–20 mA						
	TDI1G.MA	0–10 V						
	TDI1G.MD	4–20 mA						
	TDI1G.NA	0–10 V						
	TDI1G.ND	4–20 mA						
	TDI1G.OA	0–10 V						
	TDI1G.OD	4–20 mA						

Sensor Specification	Sensor Specification	Measured	Temperature
	Sensor Characteristics	Active	
	Sensor Output	0–10 V or 4–20 mA	
	Sensor Load		
	0–10 V output	Min. load 5 kΩ @ AC/DC 24 V	
	4–20 mA output	Max. load 500 Ω @ DC 24 V	
	Accuracy	±0.2 °C between 0 °C to +50 °C	
	Measuring Range (s)	-20 °C to +80 °C	
	Optional Measuring Range (s)	Free selectable via NFC -40 °C to +135 °C	
Technical Information	Electrical Information	Power Supply	AC/DC 24 V (±10 %)
	Frequency	50/60 Hz at AC 24 V	
	Terminal Clamp	Screw terminal, max. 1.5 mm ²	
	Power Consumption		
	Type with 0–10 V output	≤0.4 W / AC 24 V; ≤0.85 VA / DC 24 V	
	Type with 4–20 mA output	≤20 mA / DC 24 V	
	Mechanical Information	Immersion Rod Diameter	Ø6 mm
	Immersion Rod Length	See product range, page 1	
	Cable Entry	M16, Ø6~Ø8 mm cables	
	Sensing Element Position	External, top of the immersion rod	
Color and Materials	Housing Cover	White ABS, RAL9001 (Cream White)	
	Housing Bottom	White ABS, RAL9001 (Cream White)	
	Lock Screws	US:AISI 304; EU: EN X 6 CrNi 18 10; GER: W.N. 1.301	
	Lock Nuts	Brass	
	Cable Gland	ABS, white	
	Gland Rubber Seal	TPS, natural	
	Protection Caps	ABS, white	
	Immersion Rod	US:AISI 304; EU: EN X 6 CrNi 18 10; GER: W.N. 1.301	
	Cable	TPEE, black	
Environmental Conditions	Operation Temperature	-25 °C to +70 °C	
	Operation Humidity	100 % RH, with condensation	
	Transport Temperature	-35 °C to +70 °C	
	Transport Humidity	<90 % RH	
	Storage Temperature	-10 °C to +70 °C	
	Storage Humidity	<85 % RH, no condensation	
	IP-Rating	IP65 to IEC60529	
	REACH Regulation	Regulation (EC) No. 1907/2006	
	Product Safety	Safety class III, in accord. with EN IEC 60730-1	
	Product Standard	Automatic electrical controls for household and similar use in accordance with EN IEC 60730-1:2022	
Norms and Directives	CE marking in accordance with Directive	2014/30/EU Electromagnetic Compatibility (EMC)	
	EMC Emissions, in accordance with	EN IEC 60730-1:2022	
	EMC Immunity, in accordance with	EN IEC 60730-1:2022	
	RoHS Compliance, in accordance with	Directive 2011/65/EU, as amended by (EU) 2015/863	
	Operation Climatic Condition	IEC 60 721-3-3	
	Operation Mechanical Condition	IEC 60 721-3-2 to class2M2	
	Transport to Climatic Condition	IEC 60 721-3-2	
	Transport Mechanical Condition	IEC 60 721-3-2 to class2M2	
	Storage Climatic Condition	IEC 60 721-3-1	
	Storage Mechanical Condition	IEC 60 721-3-1 to class2M2	
Miscellaneous	Accessories	Mounting Kit, included in delivery	TDK0.G
		Accessory not included in delivery	Thermowell
	Shipping & Handling	Minimum Order	1 box with 2 pieces, multiple of 2 pieces
		Package Material	Rigid cardboard packaging
Order Notes	Order Code	See product range, page 1, e.g. TDI1G.HA	

Installation Notes	<p>Observe the following general regulation for engineering and installation:</p> <ul style="list-style-type: none"> All relevant national and local electrical installation codes Other country-specific regulations Comply with all local safety regulations, schematics, cable listings, dispositions, specifications, and arrangements from the engineering office in charge Third-party specifications, e.g., general contractors' or constructors' notes 						
Mounting Advices	<p>! Warning: Avoid mounting the device in the following ways:</p> <ul style="list-style-type: none"> Directly into a metal box (left diagram) Directly into a metal duct (middle diagram) Directly into a metal pipe (right diagram) 						
Disposal Notes	<p>! Warning: The device is considered an electronic device for disposal in terms of the European Directive 2012/19/EU</p>						
	<p>The device may not be disposed as domestic garbage</p>						
	<p>The device must be disposed through channels provided for this purpose</p>						
	<p>It is mandatory to comply with local currently applying laws and regulations</p>						
NFC Setting	<p>All devices marked with the NFC Logo can be parameterized via the Gruner AP NFC APP</p>						
	<p>The NFC APP is available on the Gruner AP Website, https://www.grunerasiapacific.com/</p>						
	<p>Hold your NFC-capable Android phone to the NFC Logo, the installed APP will start automatically</p>						
	<p>Commissioning Note: The sensor will reach its specified accuracy after 1 hour of being powered up</p>						
Accuracy Curves							
Connections, Settings	<p>Terminal Connections</p> <table border="1" data-bbox="644 1473 970 1731"> <tr> <th>S1</th> <th>S2</th> <th>S3</th> </tr> <tr> <td>UB⁺ 24V</td> <td>GND</td> <td>Temperature</td> </tr> </table>	S1	S2	S3	UB ⁺ 24V	GND	Temperature
S1	S2	S3					
UB ⁺ 24V	GND	Temperature					
Dimensional Drawing	