



DS382en

Data Sheet

TPI1-Series (T)

Pipe Temperature Sensor with Active Output



The TPI1-Series (T) is designed to measure temperature directly, without Thermowell, in water pipes

In accordance with RESET® and WELL Building Standard™ Reading

The sensor operates with low voltage power supply

Parameter settings via NFC technology

The temperature sensor output is active



Use	Compatible to all common HVAC DDC and Analog Controls systems, with/without Building Automation System							
	Used in all common HVAC applications							
Features	Used in Commercial and Industrial Buildings							
	Sensor with active output Sensor outputs 0–10 V or 4–20 mA Different immersion lengths for all common air duct and water pipe sizes Reading/Parameter settings via NFC technology Professional and practical product design Cover/bottom housing connected with magnets and screws Firmware updates via service connector Easy to use, install and maintain							
Product Range	Type Code	Output	Immersion Pocket Dimensions	Sensor Tip Dimension	Max. Waterflow	Sensor Accuracy	Measuring Ranges	Max. Pressure Rating
	TPI1G.HA	0–10 V	ø4 mm × 50 mm	ø4 mm × 42 mm	28 m/s	±0.2 °C between 0 °C to +50 °C	-20 °C to +80 °C (default) Free selectable via NFC -40 °C to +135 °C	PN40
	TPI1G.HD	4–20 mA						
	TPI1G.IA	0–10 V	Ø6 mm × 100 mm (TIP Ø4 mm × 20 mm)	ø4 mm × 20 mm	11 m/s	±0.2 °C between 0 °C to +50 °C	-20 °C to +80 °C (default) Free selectable via NFC -40 °C to +135 °C	PN40
	TPI1G.ID	4–20 mA						
	TPI1G.KA	0–10 V	Ø6 mm × 150 mm (TIP Ø4 mm × 20 mm)	ø4 mm × 20 mm	7 m/s	±0.2 °C between 0 °C to +50 °C	-20 °C to +80 °C (default) Free selectable via NFC -40 °C to +135 °C	PN40
	TPI1G.KD	4–20 mA						
	TPI1G.LA	0–10 V	Ø6 mm × 200 mm (TIP Ø4 mm × 20 mm)	ø4 mm × 20 mm	6 m/s	±0.2 °C between 0 °C to +50 °C	-20 °C to +80 °C (default) Free selectable via NFC -40 °C to +135 °C	PN40
	TPI1G.LD	4–20 mA						

Sensor Specification	Sensor Specification	Measured	Temperature
	Sensor Characteristics	Active	
	Sensing Element	PT1000 Class A	
	Sensor Output (s)	0–10 V or 4–20 mA	
	Output Load		
	0–10 V output	Min. load 5 kΩ @ AC/DC 24 V	
	4–20 mA output	Max. load 700 Ω @ DC 24 V	
	Accuracy	±0.2 °C between 0 °C to +50 °C	
	Default Measuring Range	–20 °C to +80 °C	
	Maximum Measuring Range	Free selectable via NFC –40 °C to +135 °C	
Technical Information	Electrical Information	Power Supply	AC/DC 24 V (±10 %)
	Frequency	50/60 Hz at AC 24 V	
	Terminal Clamp	Screw terminal, max. 1.5 mm ²	
	Power Consumption		
	Type with 0–10 V output	≤1 W	
	Type with 4–20 mA output	≤1 W	
	Mechanical Information	Immersion Rod Diameter	See product range, page 1
		Immersion Rod Length	See product range, page 1
		Cable Entry	M16, Ø6~Ø8 mm cables
		Sensing Element Position	External, top of the immersion rod
Norms and Directives	Materials and Colours	Housing Cover	White ABS, RAL9001 (Cream White)
	Housing Bottom	White ABS, RAL9001 (Cream White)	
	Lock Screws	US:AISI 304; EU: EN X 6 CrNi 18 10; GER: W.N. 1.301	
	Lock Nuts	Brass	
	Cable Gland	ABS, white	
	Gland Rubber Seal	TPS, natural	
	Protection Caps	TPS, white	
	Immersion Rod	US:AISI 304; EU: EN X 6 CrNi 18 10; GER: W.N. 1.301	
	Environmental Conditions	Operation Temperature	–25 °C to +70 °C
	Operation Humidity	100 % RH, with condensation	
Miscellaneous	Transport Temperature	–35 °C to +70 °C	
	Transport Humidity	<90 % RH	
	Storage Temperature	–10 °C to +70 °C	
	Storage Humidity	<85 % RH, no condensation	
	Norms and Directives	IP-Rating	IP65 in accordance with IEC60529
	REACH Regulation	Regulation (EC) No. 1907/2006	
	Product Safety	Safety class III, in accord. with EN IEC 60730-1	
	Product Standard	Automatic electrical controls for household and similar use in accordance with EN IEC 60730-1:2022	
	CE marking in accordance with Directive	2014/30/EU Electromagnetic Compatibility (EMC)	
	EMC Emissions, in accordance with	EN IEC 60730-1:2022	
Accessories	EMC Immunity, in accordance with	EN IEC 60730-1:2022	
	RoHS Compliance, in accordance with	Directive 2011/65/EU, as amended by (EU) 2015/863	
	Operation Climatic Condition	IEC 60 721-3-3	
	Operation Mechanical Condition	IEC 60 721-3-2 to class2M2	
	Transport to Climatic Condition	IEC 60 721-3-2	
	Transport Mechanical Condition	IEC 60 721-3-2 to class2M2	
	Storage Climatic Condition	IEC 60 721-3-1	
	Storage Mechanical Condition	IEC 60 721-3-1 to class2M2	
	Accessories	Mounting Kit, included in delivery	N/A
	Shipping & Handling	Minimum Order	1 box with 2 pieces, multiple of 2 pieces
Order Note	Package Material	Rigid cardboard packaging	
	Order Code	See product range, page 1, e.g. TPI1G.HA	

Installation Notes

Observe the following general regulation for engineering and installation:




All relevant national and local electrical installation codes

Other country-specific regulations

Comply with all local safety regulations, schematics, cable listings, dispositions, specifications, and arrangements from the engineering office in charge

Third-party specifications, e.g., general contractors' or constructors' notes

Mounting Advices

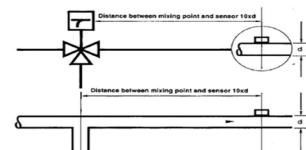

Disposal Notes



The device is considered an electronic device for disposal in terms of the European Directive 2012/19/EU

The device may not be disposed as domestic garbage

The device must be disposed through channels provided for this purpose

It is mandatory to comply with local currently applying laws and regulations

NFC Setting




All devices marked with the NFC Logo can be parameterized via the Gruner AP NFC APP

The NFC APP is available on the Gruner AP Website, <https://www.grunerasiapacific.com/>

Hold your NFC-capable Android phone to the NFC Logo, the installed APP will start automatically

Commissioning Note: The sensor will reach its specified accuracy after 1 hour of being powered up

Accuracy Curves

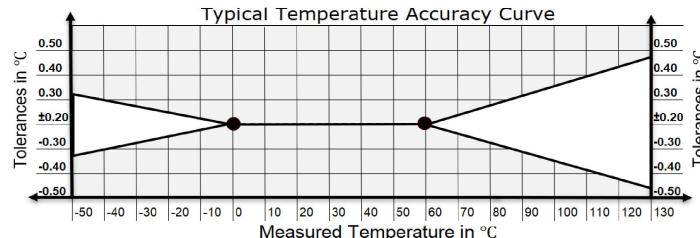

Connections & Settings

Terminal Connections		
S1	S2	S3
UB ⁺ 24V	GND	Temperature

Dimensional Drawing

